


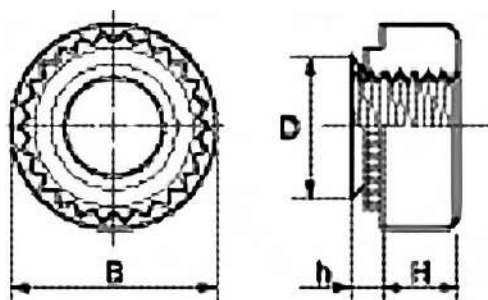

Unit: mm

Nominal Screw Size	Pitch	Type		D (MAX)	B ± 0.2	H ± 0.1	h (MAX)	Opposite Material		
		C-Steel	Stainless Steel					Minimum Plate Thickness	Mounting Hole Diameter $+0.08$ 0	Mounting Hole Position *1 {Min}
M2	0.40	TC-M2-0	TCS-M2-0	4.22	6.3	1.5	0.78	0.8	4.25	4.8
		TC-M2-1	TCS-M2-1				0.97	1.0		
		TC-M2-2	TCS-M2-2				1.37	1.4		
M2.5	0.45	TC-M2.5-0	TCS-M2.5-0	4.22	6.3	1.5	0.78	0.8	4.25	4.8
		TC-M2.5-1	TCS-M2.5-1				0.97	1.0		
		TC-M2.5-2	TCS-M2.5-2				1.37	1.4		
M3	0.50	TC-M3-0	TCS-M3-0	4.22	6.3	1.5	0.78	0.8	4.25	4.8
		TC-M3-1	TCS-M3-1				0.97	1.0		
		TC-M3-2	TCS-M3-2				1.37	1.4		
M3.5	0.60	TC-M3.5-0	TCS-M3.5-0	4.73	7.1	1.5	0.78	0.8	4.75	5.8
		TC-M3.5-1	TCS-M3.5-1				0.97	1.0		
		TC-M3.5-2	TCS-M3.5-2				1.37	1.4		
M4	0.70	TC-M4-0	TCS-M4-0	5.38	7.9	2.0	0.78	0.8	5.40	6.9
		TC-M4-1	TCS-M4-1				0.97	1.0		
		TC-M4-2	TCS-M4-2				1.37	1.4		
M5	0.80	TC-M5-0	TCS-M5-0	6.38	8.7	2.0	0.78	0.8	6.40	7.1
		TC-M5-1	TCS-M5-1				0.97	1.0		
		TC-M5-2	TCS-M5-2				1.37	1.4		
M6	1.00	TC-M6-1	TCS-M6-1	8.72	11.05	4.1	0.78	0.8	8.75	8.8
		TC-M6-2	TCS-M6-2				0.97	1.0		
		TC-M6-3	TCS-M6-3				2.21	1.4		
M8	1.25	TC-M8-2	TCS-M8-2	10.44	12.65	5.5	1.37	1.4	10.50	8.7
		TC-M8-3	TCS-M8-3				2.21	2.3		
M10	1.50	TC-M10-3	TCS-M10-3	12.65	15.00	7.0	1.95	2.0	12.70	11.6
M12	1.75	TC-M12-3	TCS-M12-3	14.65	17.00	8.0	1.95	2.0	14.70	13.5
		TC-M12-4	TCS-M12-4		20.00		2.8	3.0		18.0

* 1 Minimal distance between the mounting hole center and the end of the mounting plate